

Mouse EPI (Epinephrine) ELISA Kit | EPI elisa kit

Mouse EPI (Epinephrine) ELISA Kit

CATALOG #
AAA277822

REACTIVITY
Mouse


PRODUCT SYNONYMS

EPI (Epinephrine); Mouse EPI (Epinephrine) ELISA Kit; Adrenaline; EPI elisa kit

PRODUCT SPECIFICATIONS

Reactivity	Mouse
Specificity	This assay has high sensitivity and excellent specificity for detection of Mouse EPI. No significant cross-reactivity or interference between Mouse EPI and analogues was observed.
Assay Type	Competitive
Detection Range	31.25-2000 pg/mL
Sensitivity	16.3 pg/mL
Intra-assay Precision	Intra-assay Precision (Precision within an assay)? CV% < 8%. Three samples of known concentration were tested twenty times on 1 plate to assess intra-assay precision.
Inter-assay Precision	Inter-assay Precision (precision between assays)? CV% < 10%. Three samples of known concentration were tested in forty separate assays to assess inter-assay precision.

IMAGES

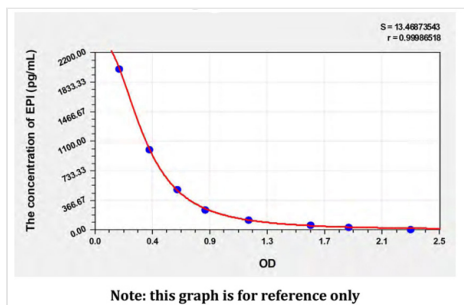

Standard Curve (Sample)

ADDITIONAL INFORMATION

Related Product Information for EPI elisa kit

Principle of the Assay: This assay employs the competitive inhibition enzyme immunoassay technique. The microtiter plate provided in this kit has been pre-coated with Mouse EPI protein. Standards or samples are added to the appropriate microtiter plate wells then with a biotin-conjugated antibody specific to Mouse EPI. Next, Avidin conjugated to Horseradish Peroxidase (HRP) is added to each microplate well and incubated. After TMB substrate solution is added. The enzyme-substrate reaction is terminated by the addition of sulphuric acid solution and the color change is measured spectrophotometrically at a wavelength of 450nm $\pm$ 10nm. The concentration of Mouse EPI in the samples is then determined by comparing the OD of the samples to the standard curve.

For Research Use Only. Not for use in diagnostic or therapeutic procedures. Small volumes of product may become entrapped in the seal of the vial during shipment and storage; if necessary, briefly centrifuge the vial on a tabletop centrifuge to dislodge any liquid in the cap.

